CONTROLMASTER®


Scanner Protection and Cleaning

Cover the scanner before washing the machine

Apply the cover when washing or high pressure cleaners are used.

- Apply the cover when the machine is parked.
- Failure to properly maintain the scanner may void the scanner warranty.




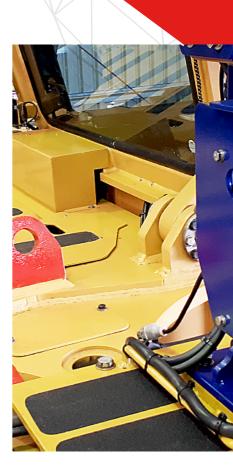

Installing the cover



1. Scanner window must be protected from high pressure water, grease and dirt when cleaning the machine with high pressure equipment.



2. Fit sock over scanner assembly from the front and fold down the tabs with the Velcro strips. Connect the Velcro strips on the rear flaps with those on the tabs.



3. Ensure it is secure by fixing the straps together.

Reference: SBCM0511074



Copyright ©

 RCT
 Australia
 +61.8
 9353.6577

 Head Office
 Africa
 +27.83.292.4246
 Canada
 +1.705.590.4001

 Unit 1-5/511 Abernethy Rd
 Central Asia
 +7.910.411.1174
 Vexedale WA 6105, Australia
 VSA
 +1.801.938.9214
 South America
 +56.3 5229.9409

sales@rct-global.com soles of the set of the

Scanner lens cleaning

The following steps need to be carried out for the front and rear scanner lens at each remote pre-start.

- 1. Wipe using a clean soft cloth to remove dust. Note: Avoid using a back-and-forth motion.
- 2. Wipe using lens cleaning towelettes (safety glass wipes).
- 3. Wipe using a clean cotton cloth.
- 4. Inspect lens, if grease or oil can still be seen, repeat steps 2 & 3.

If all grease/oil is not removed, the scanner will not run optimally and "scanner blinded" messages will occur frequently.





Pièces

APN: 10041 PROTECTIVE SCANNER COVER

Reference: SBCM0511074



Copyright © 2023 Re

 RCT
 Australia
 +61.8
 9353.6577

 Head Office
 Africa
 +27.83.292.4246
 20.3426

 Canada
 +1.705.590.4001
 10.111174

 Unit 1-5/511 Abernethy R
 Central Asia
 +7.910.4111174

 Kewdale WA 6105, Australia
 USA
 +1.801.938.9214

 South America
 +56.3.5229.9409

note Control Technologies Pty Ltd. Images for illustration purposes only. Discover more @ rct-global.com