

# Accurate, flexible and compact

## USB Configurable Tilt Switch

The AusProTec Hummingbird USB Configurable Tilt Switch is an accurate switch with voltage outputs, typically used in automation systems where voltage output is required.

Applications for tilt switches vary widely, and so do the parameters required for optimum performance. Using a built-in USB interface and free software, users can set various parameters associated with the tilt switches and can view their performance in real-time.


Dual axis sensing is supported, and two configurable alarms are available.

Configurable tilt switches measure pitch and roll angles with high accuracy by measuring the earth's gravitational field. Two internal voltage-free relays can be programmed to close or open at various combinations of the measured pitch and roll. For maximum flexibility, normally open, normally closed and common outputs are available.

An integrated USB interface means that the sensor can be configured in-application using a laptop. The USB interface allows the following configuration:

- Set alarm conditions as a combination of pitch and roll. Set hysteresis on each alarm output to avoid erratic switching at the set point.
- Zero the sensor to eradicate small offsets due to mounting. Apply variable damping to avoid false readings in mechanically noisy, environments.
- The configuration software also facilitates real-time monitoring of the pitch, roll and relay status. A scrolling graph allows the user to evaluate sensor response and noise in the application.

Please note, that the integrated relay outputs are not internally fused. Driving currents larger than those specified will result in damage to the tilt switch.

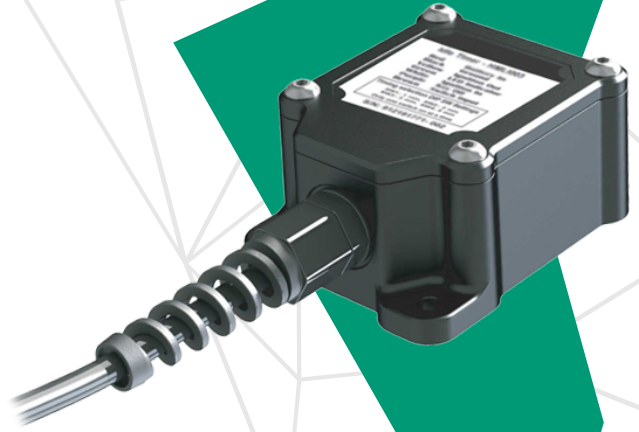

Reference: SBAP0321001



RCT  
Head Office  
Unit 1-5/511 Abernethy Rd  
Kewdale WA 6105, Australia  
sales@rct-global.com

Australia +61 8 9353 6577  
Africa +27 83 292 4246  
Canada +1 705 590 4001  
Central Asia +7 910 411 1174  
USA +1 801 938 9214  
South America +56 3 5229 9409

Copyright © 2023 Remote Control Technologies Pty Ltd. Images for illustration purposes only. Discover more @ rct-global.com

## Caractéristiques

- Accurate to 0.1 degrees for up to 30 degrees of tilt in any axis
- Manual calibration can be performed
- 2 voltage outputs
- USB configurable angle and voltage outputs
- Multi-voltage range from 9-36V
- Reverse polarity protected
- Separate outputs for pitch and roll
- Rugged aluminium enclosure

## Specifications

Input Voltage	9 – 36 VDC
Warranty	1 Year
Weight	253g (0.55lbs)
Height	35mm (1.37")
Length	82mm (3.22")
Width	57mm (2.24")

## Pièces

📍 APN: 16338

USB CONFIGURABLE TILT SWITCH

Reference: SBAP0321001



RCT  
Head Office  
Unit 1-5/511 Abernethy Rd  
Kewdale WA 6105, Australia  
sales@rct-global.com

Australia +61 8 9353 6577  
Africa +27 83 292 4246  
Canada +1 705 590 4001  
Central Asia +7 910 411 1174  
USA +1 801 938 9214  
South America +56 3 5229 9409

Copyright © 2023 Remote Control Technologies Pty Ltd. Images for illustration purposes only. Discover more @ rct-global.com